PR
CRYSTALS

Citizens Band

Crystals

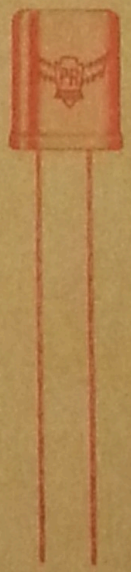

Additional copies of this booklet may be obtained from any Radio Parts Distributor, Price 25c each.

PETERSEN RADIO CO., INC. • COUNCIL BLUFFS, IOWA

MAKERS OF FINE CRYSTALS SINCE 1934

TRANSMIT XTALS

THESE 23 CHANNELS AUTHORIZED FOR CLASS "D" CITIZENS BAND USE

Channel Number	Frequency Megacycles	Channel Number	Frequency Megacycles
1	26.965	13	27.115
2	26.975	14	27.125
3	26.985	15	27.135
4	27.005	16	27.155
5	27.015	17	27.165
6	27.025	18	27.175
7	27.035	19	27.185
8	27.055	20	27.205
9	27.065	21	27.215
10	27.075	22	27.225
11	27.085	23	27.255
12	27.105		

PART 15 CHANNELS

Channel	Frequency Megacycles	Channel	Frequency Megacycles
A	26.995	E	27.195
B	27.045	F	27.235
C	27.095	G	27.245
D	27.145	H	27.265

PRICES

With certain exceptions, all PR Crystals listed in this book are calibrated .005% and priced at $2.95. If ordered calibrated .002%, the price is $3.95. Crystals with Code Numbers RAJ4, RAF1, RAC1, RZ1, RY1, RAR4, TRT4 and TRS4 are SPECIAL and are priced at $3.95.

Form 666B

Printed in U.S.A.

CITIZENS BAND
CRYSTAL FREQUENCIES

CHANNEL	—265	+ 450	—455	—455 ÷ 2	—455 ÷ 3
1	26.700	27.415	26.510	13255	8836.7
2	26.710	27.425	26.520	13260	8840.0
3	26.720	27.435	26.530	13265	8843.3
4	26.740	27.455	26.550	13275	8850.0
5	26.750	27.465	26.560	13280	8853.3
6	26.760	27.475	26.570	13285	8856.7
7	26.770	27.485	26.580	13290	8860.0
8	26.790	27.505	26.600	13300	8866.7
9	26.800	27.515	26.610	13305	8870.0
10	26.810	27.525	26.620	13310	8873.3
11	26.820	27.535	26.630	13315	8876.7
12	26.840	27.555	26.650	13325	8883.3
13	26.850	27.565	26.660	13330	8886.7
14	26.860	27.575	26.670	13335	8890.0
15	26.870	27.585	26.680	13340	8893.3
16	26.890	27.605	26.700	13350	8900.0
17	26.900	27.615	26.710	13355	8903.3
18	26.910	27.625	26.720	13360	8906.7
19	26.920	27.635	26.730	13365	8910.0
20	26.940	27.655	26.750	13375	8916.7
21	26.950	27.665	26.760	13380	8920.0
22	26.960	27.675	26.770	13385	8923.3
23	26.990	27.705	26.800	13400	8933.3

CHANNEL	—455 ÷ 4	+ 455	+ 455 ÷ 2	—1650	+ 1650
1	6627.5	27.420	13710	25.315	28.615
2	6630.0	27.430	13715	25.325	28.625
3	6632.5	27.440	13720	25.335	28.635
4	6637.5	27.460	13730	25.355	28.655
5	6640.0	27.470	13735	25.365	28.665
6	6642.5	27.480	13740	25.375	28.675
7	6645.0	27.490	13745	25.385	28.685
8	6650.0	27.510	13755	25.405	28.705
9	6652.5	27.520	13760	25.415	28.715
10	6655.0	27.530	13765	25.425	28.725
11	6657.5	27.540	13770	25.435	28.735
12	6662.5	27.560	13780	25.455	28.755
13	6665.0	27.570	13785	25.465	28.765
14	6667.5	27.580	13790	25.475	28.775
15	6670.0	27.590	13795	25.485	28.785
16	6675.0	27.610	13805	25.505	28.805
17	6677.5	27.620	13810	25.515	28.815
18	6680.0	27.630	13815	25.525	28.825
19	6682.5	27.640	13820	25.535	28.835
20	6687.5	27.660	13830	25.555	28.855
21	6690.0	27.670	13835	25.565	28.865
22	6692.5	27.680	13840	25.575	28.875
23	6700.0	27.710	13855	25.605	28.905

CITIZENS BAND
CRYSTAL FREQUENCIES

CHANNEL	+1650 ÷ 2	+1680	—1750	—2310	—3035
1	14307.5	28.645	25.215	24.655	23.930
2	14312.5	28.655	25.225	24.665	23.940
3	14317.5	28.665	25.235	24.675	23.950
4	14327.5	28.685	25.255	24.695	23.970
5	14332.5	28.695	25.265	24.705	23.980
6	14337.5	28.705	25.275	24.715	23.990
7	14342.5	28.715	25.285	24.725	24.000
8	14352.5	28.735	25.305	24.745	24.020
9	14357.5	28.745	25.315	24.755	24.030
10	14362.5	28.755	25.325	24.765	24.040
11	14367.5	28.765	25.335	24.775	24.050
12	14377.5	28.785	25.355	24.795	24.070
13	14382.5	28.795	25.365	24.805	24.080
14	14387.5	28.805	25.375	24.815	24.090
15	14392.5	28.815	25.385	24.825	24.100
16	14402.5	28.835	25.405	24.845	24.120
17	14407.5	28.845	25.415	24.855	24.130
18	14412.5	28.855	25.425	24.865	24.140
19	14417.5	28.865	25.435	24.875	24.150
20	14427.5	28.885	25.455	24.895	24.170
21	14432.5	28.895	25.465	24.905	24.180
22	14437.5	28.905	25.475	24.915	24.190
23	14452.5	28.935	25.505	24.945	24.220

CHANNEL	—3456 ÷ 2	—3580	+4000	+4225	+4300
1	11754.5	23.385	30.965	31.190	31.265
2	11759.5	23.395	30.975	31.200	31.275
3	11764.5	23.405	30.985	31.210	31.285
4	11774.5	23.425	31.005	31.230	31.305
5	11779.5	23.435	31.015	31.240	31.315
6	11784.5	23.445	31.025	31.250	31.325
7	11789.5	23.455	31.035	31.260	31.335
8	11799.5	23.475	31.055	31.280	31.355
9	11804.5	23.485	31.065	31.290	31.365
10	11809.5	23.495	31.075	31.300	31.375
11	11814.5	23.505	31.085	31.310	31.385
12	11824.5	23.525	31.105	31.330	31.405
13	11829.5	23.535	31.115	31.340	31.415
14	11834.5	23.545	31.125	31.350	31.425
15	11839.5	23.555	31.135	31.360	31.435
16	11849.5	23.575	31.155	31.380	31.455
17	11854.5	23.585	31.165	31.390	31.465
18	11859.5	23.595	31.175	31.400	31.475
19	11864.5	23.605	31.185	31.410	31.485
20	11874.5	23.625	31.205	31.430	31.505
21	11879.5	23.635	31.215	31.440	31.515
22	11884.5	23.645	31.225	31.450	31.525
23	11899.5	23.675	31.255	31.480	31.555

CITIZENS BAND
CRYSTAL FREQUENCIES

CHANNEL	—4455	—5010	+ 6000	+ 6685	—7500
1	22.510	21.955	32.965	33.650	19.465
2	22.520	21.965	32.975	33.660	19.475
3	22.530	21.975	32.985	33.670	19.485
4	22.550	21.995	33.005	33.690	19.505
5	22.560	22.005	33.015	33.700	19.515
6	22.570	22.015	33.025	33.710	19.525
7	22.580	22.025	33.035	33.720	19.535
8	22.600	22.045	33.055	33.740	19.555
9	22.610	22.055	33.065	33.750	19.565
10	22.620	22.065	33.075	33.760	19.575
11	22.630	22.075	33.085	33.770	19.585
12	22.650	22.095	33.105	33.790	19.605
13	22.660	22.105	33.115	33.800	19.615
14	22.670	22.115	33.125	33.810	19.625
15	22.680	22.125	33.135	33.820	19.635
16	22.700	22.145	33.155	33.840	19.655
17	22.710	22.155	33.165	33.850	19.665
18	22.720	22.165	33.175	33.860	19.675
19	22.730	22.175	33.185	33.870	19.685
20	22.750	22.195	33.205	33.890	19.705
21	22.760	22.205	33.215	33.900	19.715
22	22.770	22.215	33.225	33.910	19.725
23	22.800	22.245	33.255	33.940	19.755

CHANNEL	+ 8000	—10000	—20635	—23065	—24.1 MC + 595 KC
1	34.965	16965	6330	3900	3460
2	34.975	16975	6340	3910	3470
3	34.985	16985	6350	3920	3480
4	35.005	17005	6370	3940	3500
5	35.015	17015	6380	3950	3510
6	35.025	17025	6390	3960	3520
7	35.035	17035	6400	3970	3530
8	35.055	17055	6420	3990	3550
9	35.065	17065	6430	4000	3560
10	35.075	17075	6440	4010	3570
11	35.085	17085	6450	4020	3580
12	35.105	17105	6470	4040	3600
13	35.115	17115	6480	4050	3610
14	35.125	17125	6490	4060	3620
15	35.135	17135	6500	4070	3630
16	35.155	17155	6520	4090	3650
17	35.165	17165	6530	4100	3660
18	35.175	17175	6540	4110	3670
19	35.185	17185	6550	4120	3680
20	35.205	17205	6570	4140	3700
21	35.215	17215	6580	4150	3710
22	35.225	17225	6590	4160	3720
23	35.255	17255	6620	4190	3750

CITIZENS BAND CRYSTAL FREQUENCIES

CHANNEL	⅓ CHANNEL FREQ.	½ CHANNEL FREQ.	¼ CHANNEL FREQ.	CHANNEL FREQ.
1	8988.3	13482.5	6741.25	26.965
2	8991.6	13487.5	6743.75	26.975
3	8995.0	13492.5	6746.25	26.985
4	9001.6	13502.5	6751.25	27.005
5	9005.0	13507.5	6753.75	27.015
6	9008.3	13512.5	6756.25	27.025
7	9011.6	13517.5	6758.75	27.035
8	9018.3	13527.5	6763.75	27.055
9	9021.6	13532.5	6766.25	27.065
10	9025.0	13537.5	6768.75	27.075
11	9028.3	13542.5	6771.25	27.085
12	9035.0	13552.5	6776.25	27.105
13	9038.3	13557.5	6778.75	27.115
14	9041.6	13562.5	6781.25	27.125
15	9045.0	13567.5	6783.75	27.135
16	9051.6	13577.5	6788.75	27.155
17	9055.0	13582.5	6791.25	27.165
18	9058.3	13587.5	6793.75	27.175
19	9061.6	13592.5	6796.25	27.185
20	9068.3	13602.5	6801.25	27.205
21	9071.6	13607.5	6803.75	27.215
22	9075.0	13612.5	6806.25	27.225
23	9085.0	13627.5	6813.75	27.255

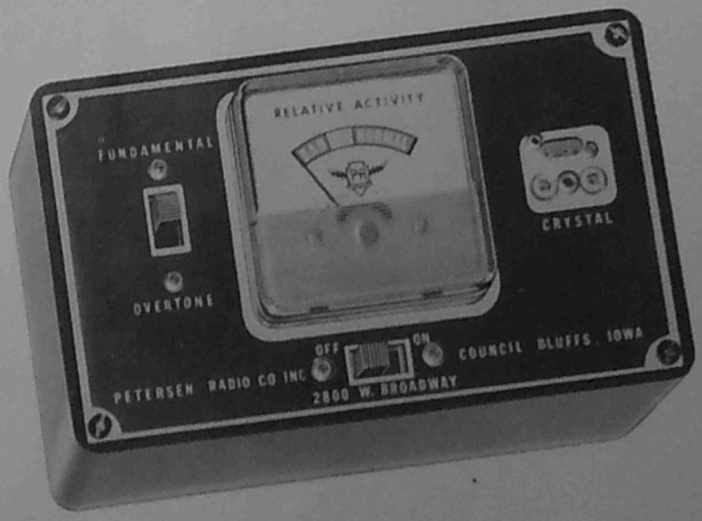

CB CRYSTAL ACTIVITY CHECKER—Less Battery, $24.95 Net

Checks activity of 6 to 13 Mc. fundamental and 25 to 32 Mc. overtone. Single function switch for fundamental or overtone mode. Meter is calibrated to read according to crystal performance, under normal operating conditions. (Mil Spec's). Silicon transistor oscillator circuit, for higher stability and performance and wider temperature range. Simple scale readings—"BAD" and "NORMAL": Handy for selected crystals for comparison. Has two sockets for crystals with .486" or .192" pin spacing. Black phenolic case with anodized aluminum top panel. Clear plastic cover over meter scale. Length 6¼", width 3¾", height 2½". Uses 9-volt battery. Weight 19 oz.

HOW TO ORDER PR CITIZENS BAND CRYSTALS

Refer to list below for manufacturer and model of equipment. For example, if you want crystals for a Bendix Model C-13, you need a TF1 Crystal for the Transmitter, or an RX1 Crystal for the Receiver. Decide which channel you want, such as Channel 17. Simply order

1 TF1 Crystal, Channel 17
or 1 RX1 Crystal, Channel 17

(You will probably need both transmitter and receiver crystals, depending on the equipment.)

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
ACTON LABS	TCV-77, TCV-271-4D	TB1	RZ1
AEROTROL		TA1	NONE
AIR COM	LE-1	TA1	RB1
AIRLINE (WARDS)	587 RADIOPHONE	TJ1	RB1
AIRLINE (WARDS)	GTI-498	TA3	RB3
AIRLINE (WARDS)	"GENERAL" TG-103, "GENERAL" 426A	TA4	RB4
ALLSTATE (SEARS)	MINITRON 6291, 6292, 6293, 6294	TN1	RD1
AMERICAN GENERAL SUPPLY	AGS-88 AGS-99	TA1	RB1
AMERICAN GENERAL SUPPLY	AGS-100	TA4	RB4
AMERICAN GENERAL SUPPLY	CT-2701	TD3	RF3
AMERICAN GENERAL SUPPLY	AGS-RT101	TA1	RB1
AMERICAN GENERAL SUPPLY	AGS-200	TA1	RX1
APELCO	AR-9	TJ1	RB1
APELCO	AR-10	TRX1	
ARKAY		TA1	RC1

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
BELCOM	E-106	TA1	RB1
BENDIX	CB-6, C-13	TF1	RX1
BENDIX	MM-8	TG1	RK1
BROWNING MOBILAIRE		TI2	RU2
BROWNING	S-9	TA1	NONE
BROWNING	T2700	TH2	RV2
BUDDY	TX-11, RC-11	TL1	RAA1
BUDDY	SPARTAN	TL1	RAG1
CADRE	C-75	TH4	RW4
CADRE	500	TA4	RA4
CADRE	510, 515, 520, 525	TH4	RA4
CAPITOL PERSONAL PHONE	309	TA1	RB1
CHANNEL MASTER	6552,6554,6558	TA4	RB4
CHANNEL MASTER	6553	TH4	RB4
CHICASHA ELECTRONICS, INC.	"CUSTOM DISPATCHER"	TA1	NONE
CITIFONE	99 ,CD11	TAA1	RBB1
CITIFONE	CD5, CD6, CD7	TA1	RB1
CITIFONE	S.S.	TRV3	
CLAIRCON	15-020, 15-030	TA4	RB4
CLAIRCON	15-035	TA4	RB4
COMMERCIAL	SSTR	TA1	NONE

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
COMM-PAC	800	TA1	RB1
CONCORD	TG-093	TH4	RF4
CONCORD	TG-132B	TA4	RB4
CONTACT 8 (See United Scientific Labs)			
CONTINENTAL INDUSTRIAL & ENG. LTD.	TRC-1036	TA4	RB4
COURIER	I	TE2	NONE
COURIER	IM	TE1 OR TG1	NONE
COURIER	"FLEET"	TG1	RF1
COURIER	AGS200	TA1	RX1
COURIER	12	TH1	RB1
COURIER	30B	TL1	RAM1
COURIER	TR6	TD4	RB4
CROWN	TRQ1000	TA3	RB3
CUSTOM COMMUNICATION CO.	MODEL 27B	TG1	NONE
CUSTOM	1000 D	TA1	NONE
DAYSTROM	DM-348	TA1	RC1
DEMCO	"SATELITE"	TG1	NONE
DEMCO	"TRAVELIER"	TA1	
DEWALD	TR-910, TR-800	TA1	NONE
DEWALD	TR-1000	TA1	RX1
DEWALD	R-1050, F-1050	TA1	RX1
DIXON ELECTRONICS		TA1	NONE
DORSAL	RT 101	TH1	RF1

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
EICO	740 WALKIE TALKIE	TA4	RB4
EICO	760, 760A, 761, 762	TH1	NONE
EICO	770, 771, 772	TA1	RG1
EICO	777	TA1	RG1
EMENEE INDUSTRIES		TA3	NONE
ENCORE	TC-902	TA3	RB3
FALCON	MARK 4, MARK 5 MODEL D	TG2	
FANON MASCO	FCB-9, MCB-99	TA1	RB1
FANON MASCO	FCB-9A, MCB-99A	TA4	RB4
FONET	101	TA1	RB1
FONET	102B	TA3	RB3
FORNAIRE	FCB5	TH2	RO2
FUGI	CBT-20	TA3	RB3
FURUNO	"CUPID 5"	TA1	RB1
FUTURA "TRANSCOM"	MODEL 391	TA4	RB4

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
GENERAL RADIOTELEPHONE	MC1, MC2, MC3	TA1	RB1
GENERAL RADIOTELEPHONE	MC4, MC5, MC6	TG1	RB1
GENERAL RADIOTELEPHONE	MC7, MC8	TRT4	
GENERAL RADIOTELEPHONE	VS-2, 4, 6, 7	TL1	RAB1
GENERAL RADIOTELEPHONE	ECHO-9 FIELDMASTER	TA1	RB1
GLOBE	CB100	TA1	RA1
GLOBE	CB100A	TA1	RB1
GLOBE	CB200	TB1	RA1
GLOBE POCKETPHONE	X-90	TA4	RB4
GLOBE STAR	65-120	TA1	RA1
GLOBE MASTER	65-220	TB1	RA1
GLOBE SPACEMATE	SM-1000	TH4	RB4
GLOBE	PRESIDENT VIII	TA1	RAF1
GLOBE	DX'ER	TA1	RAF1
GONSET	G-11, G12, G14, G15	TF1	RX1
GROVE COMMAND	G6	TA1	NONE
HALLICRAFTERS	CB1	TC1	RB1
HALLICRAFTERS	CB2	TC1	RD1
HALLICRAFTERS	CB3, CB3A, CB5, CB9	TD1	RE1
HALLICRAFTERS	CB4 WALKIE TALKIE	TD1	RF1
HALLICRAFTERS	CB6 WALKIE TALKIE	TA3	RB3

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
HALLICRAFTERS	CB7, CB10	TD1	RE1
HALLICRAFTERS	CB117	TD1	RE1
HALLICRAFTERS	CB12, CB19	TD4	RE4
HALLICRAFTERS	CB15	TH4	RB4
HALLICRAFTERS	CB8	TA4	RAI4
HALLICRAFTERS	CB11	TA4	RB4
HALLMARK	TRUETONE	TH1	RF1
HALLMARK	DUO-COMM	TA1	NONE
HALLMARK	2-12, 512	TA1	RB1
HAMMARLUND	HQ-105TR	TA1	RY1
HAMMARLUND	CB6	TG1	RX1
HAMMARLUND	CB212	TD1	RF1
HARMON MORSE	CB15	TP4	RAQ4
HARPER		TH3	RB3
HEATH	CB-1	TA1	NONE
HEATH	CB-2	TA1	RC1
HEATH	GW-10,-11,-12, GW-22,-32,-38, GW-42	TA1	RC1
HEATH	GW21, GW52	TA3	RC3
HEATH	GW30, R-220	TA3	NONE
HEATH	GW-31	TA4	RB4
HEATH	GWW-14	TD3	RW3
HEATH	MW33, MW34	TA1	RC1
INTERMARK	C-11	TA1	RB1
INTERMARK	CIPHER 1000	TA4	RB4
INTERNATIONAL EXECUTIVE	(FIRST MODEL) KB1, KB7	TG1	RM1
INTERNATIONAL EXECUTIVE	MODEL 10	TG1	NONE

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
INTERNATIONAL EXECUTIVE	MODEL 50, 100, 100A	TG1	NOT SUPPLIED
INTERNATIONAL EXECUTIVE	MODEL 1500	TG1	RAC1
ITI-901	(JAPANESE PRODUCT)	TA1	RB1
ITT DISTRIBUTOR PRODUCTS	ITT MODEL 320	TA4	RA4
IWATA ELECTRIC		TA4	RB4
JOHNSON "VIKING"	MESSENGER, MESSENGER 2	TD1	RF1
JOHNSON III	242-150	TD4	RAD4
JOHNSON "PERSONAL" MESSENGER	101-106, 242-102	TA3	RB3
JOHNSON	100	TD4	RF4
KAAR	TR326 "D" PHONE	TG1	RJ1
KAAR	HANDIPHONE T1190	TA1	RI1
KAAR	TR326A, TR327, TR333	TG1	RK1
KAAR	TR330	TA1	RI1
KAAR	SKYHAWK 335	TRS4	
KAY-TOWNES	"SQUIRE"	TG2	RT2
KELTNER	HT-2	TA4	RB4

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
KING BEE RADIO		TA1	RB1
KNIGHT	C-11	TA1	NONE
KNIGHT	C-27	TA1	RN1
KNIGHT	C-22	TA1	RX1
KNIGHT	2550, 2580	TA1	RX1
KNIGHT	10-2	TH1	NONE
KNIGHT	C-100	TA3	NONE
KNIGHT	KN2500	TA1	RX1
KNIGHT	KG4000	TD3	RW3
LAFAYETTE	HE15, HA115A	TA1	NONE
LAFAYETTE	HE20, 20A, 20B, 20C, 90	TA1	RX1
LAFAYETTE	HE29, 29A, 29B, 66, 66L, 82	TA1	RB1
LAFAYETTE	HE40, HE43, HE43C	TA1	RX1
LAFAYETTE	HB111, HB200	TG1	RX1
LAFAYETTE	HE75L, 100A	TA4	RB4
LAFAYETTE	HA300	TA4	RB4
LAFAYETTE	222	TRY3	
LAFAYETTE	333	TRW3	
LAFAYETTE	HA150	TH4	RB4
LAFAYETTE	HA60, HE86	TA4	RB4
LAFAYETTE	HB500	TP4	RAL4
LAFAYETTE	HB555	TD4	RAR4
LAFAYETTE	HE20D	TA4	RF4
LAFAYETTE	HE29C, 60, 75L, 88, 88L	TA4	RB4
LAKELAND COMMANDER	D-11	TA1	RB1

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
LAKESHORE INDUSTRIES	MODEL D-55	TA1	RG1
LA SALLE	LA-101	TH1	RB1
LINCOLN	L2000A, L2700A	TA1	NONE
LINCOLN	L-2710 WALKIE TALKIE (EARLY ISSUE)	TA3	RB3
LINCOLN	L-2710 WALKIE TALKIE (LATER ISSUE)	TA4	RB4
LLOYD'S TRANSCEIVER	WT715, WT901	TA4	RB4
MAGNAVOX		TA1	RB1
MAGNAVOX	WT101	TA4	RB4
MASTERCRAFT	1000	TA3	RB3
MAXWELL	"RADIOCOM" 27C-1	TA2	RC2
MAYFAIR		TA3	RB3
METRO STAR	7131	TG1	RR1
METROTEK	PACER, MUSTANG	TG1	RC1
METROTEK	PACER II	TG4	RC4
METROTEK	STARFIRE	TA1	RC1
METROTEK	STARCASTER DELUXE	TG1	RW1
MIDLAND	13-103, 13-105	TA3	NONE
MIDLAND	13-113, 113-110	TA4	RB4
MIDLAND	13-133	TD4	RB4
MIDLAND	13-111	TA4	RB4
MIDLAND	13-132, 13-108	TH4	RB4
MIDLAND	13-160	TH1	RE1

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
MINIPHONE	400 MKI, 400MKII	TA3	RB3
MIRATEL	CR117	TD1	RB1
MIRATEL POCKETPHONE	VP-100	TA3	RB3
MONARCH	TC-900 (EARLY ISSUE)	TA3	RB3
MONARCH	TC-900 (LATER ISSUE)	TA4	RB4
MORROW	5W1, 5W3	TG1	RL1
MORROW	VP-100	TA3	RB3
NEW VOICE	VW-100	TA3	RB3
NIVICO	TRC-125	TA3	RB3
OLSON SPOTTER	RA-530	TA1	NONE
OLSON	RA-482, RA521	TA1	RB1
OLSON	RA-396, RA-442, RA-443	TA1	RX1
OLSON	717	TG1	RC1
OSBORNE	100	TD3	RAI3
OSBORNE	100S (DUO-COMM) 100 ST	TD4	RAI4
OSBORNE	120, 320	TD4	RAI4
OSBORNE	300	TD4	RW4

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
PACE	5000	TD4	RAJ4
PACE	2	TD4	RAJ4
PACOTRONICS	CR-11	TA1	RB1
PANASONIC	T-1 (EARLY ISSUE)	TA1	RB1
PANASONIC	T-1 (LATER ISSUE)	TA3	RB3
PATTERSON	5A	TK1	RB1
PANCOM	TR-107, FB9	TA3	RB3
PEARCE SIMPSON	CBD-5	TH2	RL2
PEARCE SIMPSON	CBD COMPANION	TH2	RO2
PEARCE SIMPSON	"ESCORT"	TH2	RO2
PEARCE SIMPSON	SENTRY	TH2	RO2
PEARCE SIMPSON	GUARDIAN 23	TRU3	
PEARCE SIMPSON	SEA-B-MATE	TH2	RO2
PENNEY, J. C.	8121 PENCREST 10	TA4	RC4
PHILMORE	TC-90 WALKIE TALKIE	TA1	RB1
PHILMORE	TC-11	TA1	NONE
POLY COM	2, PC2B12, PC-11, 11G, 12G	TB2	RP2
POLY COM	N	TB2	RQ2
POLY COM	SENIOR 23	TRW3	
POLYCOM	PCN4, PCN8 PCN12, PRO	TB2	RQ2
POLY COM	COMPACT	TB2	RQ2
POLYCOM	TRANSISTORIZED COMPACT	TA4	RAI4

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
RADIFON	RT-101, RT-104 DELUXE CR-11	TH1	RF1
RADIO-PHONE		TA1	RX1
RADSON	RT-70A, RT-75A	TA1	RX1
RALEIGH	TC99	TA4	RB4
RAYCOM	11 AND 111	TRX1	
RAYTEL	TWR3	TRX1	
RAYTEL	TWR6	TD4	RF4
RAYTEL	TWR7	TP4	RW4
RAYTHEON	TWR-1 (EARLY MODEL)	TJ1	RB1
RAYTHEON	TWR-1 (LATE 1962 MODEL)	TJ1	RQ1
RAYTHEON	TWR-2, TWR-4	TK1	RQ1
RAYTHEON	TWR-5	TP4	RF4
RAYTHEON	TWR-7	TP4	RW4
RAY JEFFERSON		TA1	NONE
RCA	MARK VII	TH1	RD1
RCA	MARK VIII, IX	TA1	RE1
RCA	MARK X	TD4	RAJ4
RCA	CRM-P2A-5	TD1	RX1
REALISTIC	CBK-1	TA1	RB1
REALISTIC	TRC-5	TL1	RB1
REALISTIC	TRC-8D	TG1	RR1
REALISTIC	TRC-27A	TM1	RB1
REALISTIC POCKETPHONE	REALISTIFONE	TA1	RB1
REALISTIC	TRC-X20	TH1	RB1
REALTONE	TR-6134	TA3	RB3
REALTONE	TR-6436	TH1	RB1
REDI-COMM	10-2	TA1	RB1
REGENCY	CBM-27	TA1	NONE
REGENCY	ROMPER AM (A-3)	TRZ1	
REGENCY	RANGER CB270	TH4	RAS4
REMINGTON	STR908, TR100, STR100	TD3	RB3

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT			
Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
RME	4303	TA3	NONE
RME	4304	TH4	RB4
RME	4305	TN1	RD1
ROSS LABS	MODEL 100 "POCKET PAGER"	TA3	RC3
ROSS LABS	200	TA3	NONE
ROSS LABS	300	TA3	RC3
ROSS	RE-011, 11TR TRANSC.	TA4	RB4
RUTHERFORD	400	TJ1	RX1
RUTHY	EA-2	TA4	RB4
SAMPSON	T-110A	TG1	RAE1
SEARS	6452, 6455	TA4	RB4
SEARS	SILVERTONE 6552	TD4	RE4
SHELL	CB-12	TA1	NONE
SONAR	MODEL "C"	TJ1	RS1
SONAR	"D"	TA1	RB1
SONAR	"E" (Below Serial #916)	TJ1	RB1
SONAR	"E" (Serial #916 and Above)	TJ1	RS1
SONAR	"G" "H"	TJ1	RS1
SONAR	T-2	TA4	RB4
SONIC-AIRE	SA-101	TH3	RB3
SONY	CB-901	TA3	RB3
SONY	CB-106	TA3	RB3
SPACE MATE	SM-1000	TH1	RB1
SPACE MATE		TH4	RB4

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
SPACE PHONE	S-2000, S-2100, S-2200, MK-11	TA3	NONE
STAR-LITE	ST300, ST400, TFM436	TA3	RB3
STONER	SE-107	TD3	RF3
TECRAFT	FALCON	TG2	RT2
TELECON BY LINDMARK	TMC 401	TA1	RB1
TELECON	202	TA4	RB4
TELRAD		TH1	RX1
TINY TALKIE		TA4	NONE
TOKAI WALKIE TALKIE	TC-911, 902	TA4	RB4
TOKAI	912	TA4	RB4
TRANSCENDOR		TD1	RF1
TRANSETTE	HT-4T	TA1	RB1
TRANSI-PHONE	CT-100	TA3	RB3
TRIUMPH	TC-900, 13-109 (EARLY ISSUE)	TA3	RB3
TRIUMPH	TC-900, 13-109 (LATER ISSUE)	TA4	RB4
TRIUMPH	13-119	TA1	RB1
TRIUMPH	TC10, 13-110	TA4	RB4
TRUETONE (WESTERN AUTO)	DC4301	TA4	RB4

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
UNITED SCIENTIFIC LABS	CONTACT 8	TL1	RE1
UNITED SCIENTIFIC LABS	TR800, TR910	TA1	NONE
UNITED SCIENTIFIC LABS	TR1000, TR1050	TA1	RX1
UNIVERSAL		TA3	RB3
UTICA	TOWN & COUNTRY MC27	TA1	RA1
UTICA	TOWN & COUNTRY 11	TH1	RA1
VANGUARD	(EARLY MODEL)	TD1	NONE
VANGUARD	MARK 1, MARK 2A	TD1	RF1
VESPER		TA3	RB3
VOCALINE	"COMMAIRE ED27"	TA2	RU2
VOCALINE	ED27M, ED276	T12	RU2
VOCALINE	PT-27	TO2	RAH2
VOCALINE	278	TI1	RAP1
VOICE	DELUXE	TA4	RB4
WEBCOR	ET350 (MICRO 350)	TA4	RC4
WEBSTER	4-11 (EARLY MODEL)	TJ1	RB1

CODE NOS. OF CRYSTALS FOR CB EQUIPMENT

Equipment Manufacturer	Model	Code No. For Transmitter	Code No. For Receiver
WEBSTER	4-11 (LATE MODEL) 4-12	TK1	RQ1
WEBSTER	440 "BANDSPANNER"	TRX1	
WEBSTER	565	TH4	RF4
WEBSTER	550	TP4	RF4
WEBSTER	WT-2	TD4	RF4
WEE-PHONE		TA4	RB4
WESTERN AUTO STORES	190, TRE515	TA1	RB1
WESTINGHOUSE COMMUNICATOR	H963TC8GP	TH3	RAO3
WESTINGHOUSE	TR-1, H869TC9 SERIES	TA3	RC3
WESTRON	909	TA1	RB1
WESTRON	929	TA4	RB4
WORLD RADIO LABS	ECBK	TA1	NONE
WORLD RADIO LABS	RUSTLER	TG1	RC1
WORLD RADIO LABS	"SPACE MATE" SM-100	TH4	RB4
WORLD'S CHAMPION	MODEL #77	TA1	RB1

PR CRYSTALS BY THESE CODE NUMBERS ARE FOR USE WITH EQUIPMENT AS LISTED BELOW

MANUFACTURER	MODEL
Code TA1	
AEROTROL	
AIR COM	LE1
AMERICAN GENERAL SUPPLY	AGS-88 AGS-99
AMERICAN GENERAL SUPPLY	AGS-RT101
AMERICAN GENERAL SUPPLY	AGS-200
ARKAY	
BELCOM	E-106
BROWNING	S-9
CAPITOL PERSONAL PHONE	309
CITIFONE	CD 5, 6, and 7
COMMERCIAL	SSTR
COM-PAC	800
COURIER	AGS 200
CUSTOM DISPATCHER	
CUSTOM	1000 D
DAYSTROM	DM-348
DEMCO "TRAVELIER"	
DEWALD	TR-910, TR-800
DEWALD	TR-1000
DEWALD	R-1050, F-1050
DIXON ELECTRONICS	
EICO	770, 771, 772, 777
FANON MASCO	FCB-9, MCB-99
FONET	101
FURUNO	"Cupid 5"
GENERAL RADIO TELEPHONE	MC-1, MC-2, 3

MANUFACTURER	MODEL
Code TA1	
GENERAL RADIO TELEPHONE	Echo-9
GLOBE	CB100, CB100A
GLOBE STAR	65-120
GLOBE	President VIII
GLOBE	DX'ER
GROVE COMMAND	G6
HALLMARK	Duo-Comm
HALLMARK	2-12, 512
HAMMARLUND	HQ-105TR
HEATH	CB-1, CB-2
HEATH	GW10, 11, 12, 22, 32, 38, 42
HEATH	MW33, MW34
INTERMARK	C-11
ITI	901
KAAR HANDIPHONE	T 1190
KAAR	TR 330
KING BEE RADIO	
KNIGHT	C-11, C-27, C22, KN 2500
KNIGHT	2550, 2580
LAFAYETTE	HE 15, 20, 20A 20B, 20C, 90
LAFAYETTE	HE29, 29A, 29B, 66, 66L, 82
LAFAYETTE	HE40, 43, 43C
LAKELAND	Commander D-11
LAKESHORE IND.	Model D55
LINCOLN	L2000A, L2700A
MAGNAVOX	
METROTEK	Starfire

MANUFACTURER	MODEL
Code TA1	
OLSON SPOTTER	RA-530
OLSON	RA-482, RA-521
OLSON	RA-396, 442, 443
PACOTRONICS	CR-11
PANASONIC	(Early Issue) T-1
PHILMORE WALKIE TALKIE	TC-90
PHILMORE	TC-11
RADIO-PHONE	
RADSON	RT-70A, RT-75A
RAY JEFFERSON	
RCA	Mark VIII, Mark IX
REALISTIC	CBK-1
REALISTIC POCKETPHONE	
REDICOMM	10-2
REGENCY	CBM-27
SHELL	CB-12
SONAR	D
TELECON BY LINDMARK	TMC-401
TRANSETTE	HT-4T
TRIUMPH	13-119
UNITED SCIENTIFIC LABS	TR-800, 910, 1000, 1050
UTICA TOWN & COUNTRY	MC-27
WESTERN AUTO STORES	190, TRE512
WESTRON	909
WORLD RADIO LABS	ECBK
WORLD'S CHAMPION	77

MANUFACTURER	MODEL
Code TA1	
See Pg 39 for Code TA2	
Code TA2	
MAXWELL RADIOCOM	27C-1
VOCALINE COMMAIRE	ED-27
Code TA3	
AIRLINE (Wards)	GT1-498
CROWN	TRQ 1000
EMENEE IND.	
ENCORE	TC-902
FONET	102B
FUGI	CBT-20
HALLICRAFTERS	CB-6
HEATH	GW21, 52
HEATH	GW30, R-220
JOHNSON PERSONAL MESSENGER	101-106, 242-102
KNIGHT	C-100
LINCOLN WALKIE TALKIE (Early)	L-2710
MAYFAIR	(2)

MANUFACTURER	MODEL
Code TA3	
MIDLAND	13-105, 13-103
MINIPHONE 400	MK-1, MK-11
MASTERCRAFT	1000
MIRATEL POCKETPHONE	VP-100
MONARCH (Early Issue)	TC-900
MORROW	VP-100
NEW VOICE	VW-100
NIVICO	TRC-125
PANASONIC (Later Issue)	T-1
PANCOM	TR-107, FB9
REALTONE	TR-6134
RME	4303
ROSS LABS	100, 200, 300
SONY	CB-901, CB-106
SPACE PHONE	S-2000, 2100, 2200
SPACE PHONE	MK-11
STAR-LITE	ST300, ST400, TFM436
TRANSI-PHONE	CT-100
TRIUMPH (Early)	TC-900, 13-109
UNIVERSAL	
VESPER	
WESTING-HOUSE	TR-1, H869, TC9

MANUFACTURER	MODEL
Code TA4	
AMERICAN GENERAL SUPPLY	AGS100
CADRE	500
CHANNEL MASTER	6554
CHANNEL MASTER	6558, 6552
CLAIRCON	15-020, 15-030, 15-035
CONCORD	TG-132B
CONTINENTAL IND. AND ENG.	TRC-1036
EICO	740
FANON MASCO	FCB-9A, MCB-99A
FUTURA TRANSCOM	391
GLOBE POCKETPHONE	X-90
HALLICRAFTERS	CB-8, CB-11
HEATH	GW31
INTERMARK	Cipher 1000
ITT	320
IWATA ELECTRIC	
KELTNER	HT-2
LAFAYETTE	HE75L, 100A
LAFAYETTE	HE20D
LAFAYETTE	HA60, HE86
LAFAYETTE	HE29C, 60, 88
LAFAYETTE	75L, 88L
LAKESHORE IND.	Dual D
LINCOLN (Late Issue)	L-2710
LLOYD'S TRANSCEIVER	WT715, WT901
MAGNAVOX	WT-101
MIDLAND	113-110, 13-111, 13-113
MONARCH (Late Issue)	TC-900
J. C. PENNEY	8121, Pencrest 10
POLYCOM	Transistorized Compact
RALEIGH	TC99
ROSS	11TR Transceiver

MANUFACTURER	MODEL
Code TA4	
RUTHY	EA-2
SEARS	6452, 6455
SONAR	T-2
TELECON	202
TINY TALKIE	
TOKAI	Walkie Talkie TC-911
TOKAI	902, 912
TRIUMPH (Late Issue)	TC-900, 13-109
TRIUMPH	TC-10, 13-110
VOICE DELUXE	
WARDS	TG-103, 426A
WEBCOR	ET 350
WEE-PHONE	
WESTERN AUTO	Truetone DC4301
WESTRON	929
Code TB1	
ACTON LAB	TCV-77, TCV-271-4D
GLOBE	CB-200
GLOBE MASTER	65-220

MANUFACTURER	MODEL
Code TB2	
POLYCOM	2, PC2, B12, PC-11, 11G, 12G
POLYCOM	N
POLYCOM	PCN8, PCN4, PCN12
POLYCOM	Compact, PRO
Code TC1	
HALLICRAFTER	CB-1, CB-2
Code TD1	
HALLICRAFTERS	CB3, CB3A, CB4
HALLICRAFTERS	CB17, CB5, CB7
HALLICRAFTERS	CB9, CB10
HAMMARLUND	CB212
JOHNSON MESSENGER, MESSENGER	2
MIRATEL	CR 117
RCA	CRM-P2A-5
TRANSCENDOR	1000
VANGUARD	Mark I, Mark 2A
VANGUARD (Early Model)	

MANUFACTURER	MODEL
Code TD3	
AMERICAN GENERAL SUPPLY	CT-2701
HEATH	GWW14
KNIGHT	KG-4000
OSBORNE	100
REMINGTON	STR 908, 100, TR100
STONER	SE-107
Code TD4	
COURIER	TR-6
HALLICRAFTERS	CB12, CB19
JOHNSON	100
JOHNSON III	242-150
LAFAYETTE	HB555
MIDLAND	13-133
OSBORNE	100S, 100ST
OSBORNE	120, 320, 300
PACE	2, 5000
RAYTEL	TWR6
RCA	MARK X
WEBSTER	WT-2

MANUFACTURER	MODEL
Code TE1	
COURIER (6 Mc.)	1M
Code TE2	
COURIER	1
Code TF1	
BENDIX	CB-6, C-13
GONSET	G11, G12, G14, K15
Code TG1	
BENDIX	MM-8
COURIER (13 Mc.)	1M
FLEET COURIER	
CUSTOM COMMUNICATION CO.	27B
DEMCO	Satelite
GENERAL RADIOTELEPHONE	MC4, MC5, MC6
HAMMARLUND	CB6

MANUFACTURER	MODEL
Code TG1	
INTER. EXECUTIVE	KB1, KB7
INTER. EXECUTIVE	10, 50, 100,100A
INTER. EXECUTIVE	1500
KAAR	TR 326
KAAR	TR326A, TR327, TR333
LAFAYETTE	HB200 HB 111
METROSTAR	7131
METROTEK	Starcaster Deluxe
METROTEK	Pacer, Mustang
MORROW	5W1, 5W3
OLSON	717
REALISTIC	TRC-8D
SAMPSON	T110A
Code TG2	
FALCON	Mark 4, Mark 5, Model D
KAY-TOWNES	Squire
TECRAFT	Falcon

MANUFACTURER	MODEL
Code TG4	
METROTEK	PACER II
Code TH1	
COURIER	12
DORSAL	RT 101
EICO	760, 760A, 761, 762
HALLMARK	Truetone
KNIGHT	10-2
LaSALLE	La-101
MIDLAND	13-160
RADIFON	RT-101, Deluxe CR-11
RADIFON	RT-104
RCA	Mark VII
REALISTIC	TRC-X20
REALTONE	TR-6436
SPACE MATE	SM-1000
TELRAD	
UTICA	Town and Country II
Code TH2	
BROWNING	T-2700
FORNAIRE	FCB5
PEARCE SIMPSON	CBD-5

MANUFACTURER	MODEL
Code TH2	
PEARCE SIMPSON	Companion, Sea-B-Mate, Escort
PEARCE	Sentry I, Companion
Code TH3	
SONIC-AIRE	Sa-101
WESTINGHOUSE COMMUNICATOR	H963TC8GP
HARPER	
Code TH4	
CADRE	C-75
CADRE	510, 515, 520, 525
CHANNEL MASTER	6553
CONCORD	TG-093
GLOBE SPACE MATE	SM-1000
HALLICRAFTERS	CB15
LAFAYETTE	HA150
MIDLAND	13-108, 13-132
REGENCY	Ranger CB-270
RME	4304
WEBSTER	565
WORLD RADIO LABS	Space Mate SM-100

MANUFACTURER	MODEL
Code TH4	
Code TI1	
VOCALINE	278
Code TI2	
BROWNING	Mobilaire
VOCALINE	ED27M, ED276
Code TJ1	
AIRLINE	587
APELCO	AR-9
RAYTHEON	TWR-1
RUTHERFORD	400
SONAR	C, E, G
WEBSTER (Early Model)	4-11

MANUFACTURER	MODEL
Code TK1	
PATTERSON	5A
RAYTHEON	TWR-2, TWR-4
WEBSTER (Late Model)	4-11, 4-12
Code TL1	
BUDDY	TX-11, RC-11, Spartan
COURIER	30B
GENERAL RADIOTELEPHONE	VS-2, 4, 6, 7
REALISTIC	TRC-5
UNITED SCIENTIFIC LABS.	Contact 8
Code TM1	
REALISTIC	TRC-27A
Code TM4	
LAFAYETTE	HA-300
Code TM4	
Code TN1	
ALLSTATE	6291, 6292, 6293, 6294
RME	4305
Code TO2	
VOCALINE	PT-27
Code TP4	
HARMON MORSE	CB-15
LAFAYETTE	HB500
RAYTEL	TWR7
RAYTHEON	TWR-5 TWR7
WEBSTER	550

MANUFACTURER	MODEL
Code TAA1	
CITIFONE	99, CD11
Code TRS4	
KAAR	Skyhawk 335
Code TRT4	
GENERAL RADIOTELEPHONE	MC7, MC8
Code TRU3	
PEARCE SIMPSON	Guardian 23

MANUFACTURER	MODEL
Code TRV3	
CITIFONE	S.S.
Code TRW3	
LAFAYETTE	333
POLY COM	Senior 23
Code TRX1	
APELCO	AR-10
RAYCOM	II and III
RAYTEL	TWR3
WEBSTER BANDSPANNER	440
Code TRY3	
LAFAYETTE	222

MANUFACTURER	MODEL
Code TRZ1	
REGENCY	Romper AM (A-3)
Code RA1	
GLOBE	CB100, CB200
GLOBE STAR	65-120
GLOBE MASTER	65-220
UTICA Town and Country	MC27, II
Code RA4	
CADRE	500, 510, 515, 520, 525
ITT	Model 320
Code RB1	
AIR COM	LE1
AIRLINE	587
AMERICAN GENERAL SUPPLY	AGS-99 AGS88, AGSRT 101
APELCO	AR-9
BELCOM	E-106
CAPITOL PERSONAL PHONE	309

MANUFACTURER	MODEL
Code RB1	
CITIFONE	CD5, CD6, CD7, 99
COMM-PAC	800
COURIER	12
FANON MASCO	FCB-9, MCB-99
FONET	101
FURUNO	Cupid 5
GENERAL RADIO TELEPHONE	MC3, MC4, MC5, MC6 MC1, MC2
GENERAL RADIO TELEPHONE	Echo 9
GLOBE	CB-100A
HALLICRAFTERS	CB-1
HALLMARK	2-12, 512
INTERMARK	C-11
ITI	901
KING BEE RADIO	
LAFAYETTE	HE29, 29A, 29B, 82 66, 66L
LAKELAND	Commander D-11
LaSALLE	LA-101
MAGNAVOX	
MIRATEL	CR-117
OLSON	RA-482, RA-521
PACOTRONICS	CR-11
PANASONIC (Early Model)	T-1
PATTERSON	5A
PHILMORE	TC-90
RAYTHEON (Early Model)	TWR-1
REALISTIC	TRC-5, TRC-27A
REALISTIC	Pocketphone
REALISTIC	CBK-1 TRC-X20
REALTONE	TR-6436
REDI-COMM	10-2
SONAR	D

MANUFACTURER	MODEL
Code RB1	
SONAR (Below 916)	E
SPACE MATE	SM-1000
TELCON BY LINDMARK	TMC-401
TRANSETTE	HT-4T
TRIUMPH	13-119
WEBSTER (Early Model)	4-11
WESTERN AUTO	190, TRE512
WESTRON	909
WORLD'S CHAMPION	77
Code RB3	
AIRLINE	GT1-498
CROWN	TRQ 1000
ENCORE	TC-902
FONET	102B
FUGI	CBT-20
HALLICRAFTERS	CB-6
HARPER	
JOHNSON PERSONAL MESSENGER	101-106, 242-102
LINCOLN (Early Iissue)	L-2710
MASTERCRAFT	1000
MAYFAIR	
MINIPHONE	400MKI, 400MKII
MIRATEL POCKETPHONE	VP-100

MANUFACTURER	MODEL
Code RB3	
MONARCH (Early Issue)	TC-900
MORROW	VP-100
NEW VOICE	VW-100
NIVICO	TRC-125
PANASONIC (Late Issue)	T-1
PANCOM	TR-107, FB9
REALTONE	TR-6134
REMINGTON	STR 908, 100, TR100
SONIC-AIRE	SA-101
SONY	CB-901, CB-106
STAR-LITE	ST300, ST400, TFM436
TRANSI-PHONE	CT-100
TRIUMPH (Early Issue)	TC-900, 13-109
UNIVERSAL	
VESPER	
Code RB4	
AIRLINE "GENERAL"	TG-103, 426A
AMERICAN GENERAL SUPPLY	AGS100
CHANNEL MASTER	6558, 6552
CHANNEL MASTER	6553, 6554
CLAIRCON	15-020, 15-030, 15-035
CONCORD	TG-132B
CONTINENTAL	TRC-1036

MANUFACTURER	MODEL
Code RB4	
COURIER	TR-6
EICO WALKIE TALKIE	740
FANON MASCO	FCB-9A, MCB-99A
FUTURA TRANSCOM	391
GLOBE POCKETPHONE	X-90
GLOBE SPACEMATE	SM-1000
HALLICRAFTERS	CB-11
HALLICRAFTERS	CB15
HEATH	GW-31
INTERMARK CIPHER	1000
IWATA ELECTRIC	
KELTNER	HT-2
LAFAYETTE	HE75L, 100A
LAFAYETTE	HA-300, HE29C
LAFAYETTE	HA150, HA60, HE86
LAFAYETTE	60, 88, 75L, 85L
LINCOLN (Late Issue)	L-2710
LLOYD'S TRANSCEIVER	WT715, WT901
MAGNAVOX	WT 101
MIDLAND	13-108, 113-110, 13-132
MIDLAND	13-111, 13-133, 13-113
MONARCH (Late Issue)	TC-900
RALEIGH	TC99
RME	4304
ROSS	11TR Transceiver
RUTHY	EA-2
SEARS	6452, 6455
SONAR	T-2
SPACE MATE	
TELECON	202
TOKAI WALKIE WALKIE	TC-911

MANUFACTURER	MODEL
Code RB4	
TOKAI	902, 912
TRIUMPH (Late Issue)	TC-900, 13-109
TRIUMPH	TC10, 13-110
VOICE	Deluxe
WEE-PHONE	
WESTERN AUTO	Truetone DC4301
WORLD RADIO LABS	Spacemate SM-100
Code RC1	
ARKAY	
DAYSTROM	DM-348
HEATH	CB-2
HEATH	GW10, 11, 12, 22, 32, 38, 42
HEATH	MW33, MW34
METROTEK	Pacer, Mustang
METROTEK	Starfire
OLSON	717

MANUFACTURER	MODEL
Code RC2	
MAXWELL	Radiocom 27C-1
Code RC3	
HEATH	GW21, GW52
ROSS LABS	Pocket Pager 100
ROSS LABS	300
WESTING-HOUSE	TR-1, H869, TC9
Code RC4	
METROTEK	PACER II
J. C. PENNEY	8121, Pencrest 10
WEBCOR	ET 350
Code RD1	
ALLSTATE MINITRON	6291, 6292, 6293, 6294
HALLICRAFTERS	CB-2
RCA	Mark VII
RME	4305

MANUFACTURER	MODEL
Code RE1	
HALLICRAFTERS	CB3, CB3A, CB5
HALLICRAFTERS	CB7, CB9, CB10
HALLICRAFTERS	CB17
MIDLAND	13-160
RCA	Mark VIII, Mark IX
UNITED SCIENTIFIC LABS.	Contact 8
Code RE4	
HALLICRAFTERS	CB12, CB19
SEARS	Silvertone 6552
Code RF1	
COURIER	Fleet
DORSAL	RT 101
HALLICRAFTERS	CB-4
HALLMARK	Truetone
HAMMARLUND	CB212
JOHNSON MESSENGER	II
RADIFON	RT101, Deluxe CR-11
RADIFON	RT104
TRANSCENDER	
VANGUARD	Mark 1, Mark 2A

MANUFACTURER	MODEL
Code RF3	
AMERICAN GENERAL SUPPLY	CT-2701
STONER	SE-107
Code RF4	
CONCORD	TG-093
JOHNSON	100
LAFAYETTE	HE20D
RAYTEL	TWR6
RAYTHEON	TWR5
WEBSTER	550, 565, WT-2
Code RG1	
EICO	770, 771, 772, 777
LAKESHORE IND.	D-55
Code RI1	
KAAR	Handiphone T1190
KAAR	TR330
Code RJ1	
KAAR	TR 326
Code RK1	
BENDIX	MM8
KAAR	TR326A, TR327, TR333
Code RL1	
MORROW	5W1, 5W3
Code RL2	
PEARCE SIMPSON	CBD-5
Code RM1	
INTER. EXEC.	KB1, KB7
Code RN1	
KNIGHT	C-27
Code RO2	
FORNAIRE	FCB5
PEARCE SIMPSON	Sea-B-Mate CBD Companion
PEARCE SIMPSON	Escort
PEARCE SIMPSON	Sentry I

MANUFACTURER	MODEL
Code RP2	
POLYCOM	2, PC2B12, PC-11, 11G, 12G
POLYCOM	PCN4, PCN8, PRO
Code RQ1	
RAYTHEON (Late 1962 Model)	TWR-1
RAYTHEON	TWR-2, TWR-4
WEBSTER (Late Model 4-11)	4-12
Code RQ2	
POLYCOM	PCN8, PCN4, PCN12, Pro , N
Code RR1	
REALISTIC	TRC-8D
Code RS1	
SONAR (Above #916)	E
SONAR	H, C, G
Code RT2	
TECRAFT	Falcon
KAY-TOWNES	Squire

MANUFACTURER	MODEL
Code RU2	
BROWNING	Mobilaire
VOCALINE	Commaire ED27
VOCALINE	ED27M, ED276
Code RV2	
BROWNING	T2700
Code RW1	
METROTEK	Starcaster Deluxe
Code RW3	
HEATH	GWW14
KNIGHT	KG4000
Code RW4	
CADRE	C-75
OSBORNE	300
RAYTEL	TWR7
Code RX1	
AMERICAN GENERAL SUPPLY	AGS 200
BENDIX	CB6, C-13

28.715

MANUFACTURER	MODEL
Code RX1	
COURIER	AGS200
DEWALD	TR1000, R-1050, F1050
GONSET	G11, G12, G14, G15
HAMMARLUND	CB-6
KNIGHT	C-22
KNIGHT	2550, 2580 KN2500
LAFAYETTE	HE20, 20A, 20B, HB200 20C, 90
LAFAYETTE	HE40, HE43, HB111
OLSON	RA-396, RA-442, RA-443
RADIO-PHONE	
RADSON	RT70A, RT-75A
RCA	CRM-P2A-5
RUTHERFORD	400
TELRAD	
UNITED SCIENTIFIC LABS	TR 1000, TR 1050
Code RY1	
HAMMARLUND	HQ 105-TR
Code RZ1	
ACTON LABS	TCV-77, TCV-271-4D

MANUFACTURER	MODEL
Code RAA1	
BUDDY	RC-11
Code RAB1	
GENERAL RADIOTELEPHONE	VS-2, 4, 6, 7
Code RAC1	
INTERNATIONAL EXECUTIVE	1500
Code RAD4	
JOHNSON III	242-150
Code RAE1	
SAMPSON	T-110A
Code RAF1	
GLOBE	President VIII
GLOBE	DX'ER

MANUFACTURER	MODEL
Code RAG1	
BUDDY	Spartan
Code RAH2	
VOCALINE	PT-27
Code RBB1	
CITIFONE	99, CD11
Code RAI3	
OSBORNE	100
Code RAI4	
HALLICRAFTERS	CB-8
OSBORNE	100S Duo-Comm
OSBORNE	100ST, 120, 320
POLYCOM	Transistorized Compact
Code RAJ4	
PACE	2, 5000
RCA	MARK X

MANUFACTURER	MODEL
Code RAL4	
LAFAYETTE	HB500
Code RAM1	
COURIER	30B
Code RAO3	
WESTINGHOUSE COMMUNICATOR	H963TC8GP
Code RAP1	
VOCALINE	278
Code RAQ4	
HARMON MORSE	CB-15
Code RAR4	
LAFAYETTE	HB555
Code RAS4	
REGENCY	Ranger CB-270

The PRM
COMPACT CONVERTER
Converts VHF to Broadcast

With it you can monitor VHF such as aircraft, business, marine, police, railroad, taxicab, radiotelephone and others, with your transistor broadcast radio. Crystal controlled.

Place the PRM Converter next to a good 6-10 transistor broadcast radio, tuned to a frequency determined by the crystal. No internal connection needed. Performance of 20 miles or more under good conditions.

Powered by 9-volt transistor battery. Case 2⅞ x 1⅞ x 4 inches. Antenna extends to 36 inches. Weight 8½ ounces complete. Specify VHF frequency to be received, also broadcast frequency desired on transistor radio.

THREE FREQUENCY RANGES
PRM ONE—148-175 mc.
PRM TWO—25-50 mc.
AM or FM
PRM THREE—108-136 mc.

LESS BATTERY

$24.95

At your CB Dealer